Definitions and Concepts

hussein suleman uct cs honours 2007

Non-IT Examples

- Why do the staples always fit in the stapler? Do they always fit?
- Why does your TV always work with your VCR? Does it always work?
- Have you ever bought shoes? Does the size always work? Why or why not?
- How come a paper punch always makes holes at the same distance apart? Does it always?



IT Example

- □ Pay for groceries at Grab 'n Go
 - Teller swipes credit card
 - Machine knows standard card format
 - Machine contacts store's bank
 - Store's bank contacts customer's bank
 - Customer's bank checks account, deducts sum and transfers to store's bank
 - Store's bank is given clearance to proceed
 - Machine prints out receipt



Types of Interoperability

- Software System Interoperability
- Business Process Interoperability
- Manufacturing
- □ Networking (Hardware) Interoperability

Interoperability

Software

With respect to software, the term interoperability is used to describe the capability of different programs to exchange data via a common set of business procedures, and to read and write the same file formats and use the same protocols.

The shility to execute the same binary code on

source: http://en.wikipedia.org/wiki/Interoperability

"Interoperability. Perhaps the most important thing that the Internet has given us is a platform upon which experience is interoperable"

Lawrence Lessig, http://creativecommons.org/weblog/entry/5676

Why Interoperate?

- Connect services together
 - e.g., Transfer money from one bank to another electronically
- Build meta-archives
 - e.g., Google Scholar
- Save money on development
 - e.g., Well-known DOM APIs and tools
- Preserve information and increase accessibility
 - e.g., PDF(/A) as a standard data format
- Promote openness/choice
 - e.g., Microsoft's support for Open Document Format!



Syntactic vs. Semantic Interoperability

- □ Syntactic means the **syntax** is standardised.
 - e.g., XML
- □ Semantic means the **meaning** is standardised.
 - e.g., Dublin Core metadata
- Many popular standards define abstract semantics and one or more concrete syntaxes.
 - e.g., Dublin Core

Data Formats vs. Protocols

- Data Formats refer to how data is stored.
 - Can we standardise data formats?
 - How much can we specify in terms of syntax and semantics?
- Protocols refer to how communication occurs between parties.
 - Can we standardise communications between 2 parties?
 - Can we design standard protocols for large groups of parties with common interests?
- How do we build solutions with both protocols and standard data formats?
 - Where does the protocol end and the data format start?

Standards vs. Specifications

- A Specification can be any formal description.
 - Any non-trivial software tool usually has specifications.
- A Standard is a formal description that is endorsed, validated and maintained by a standards body.
 - e.g., HTTP, endorsed by the IETF/W3C


Network Working Group Request for Comments: 2616 Obsoletes: 2068 Category: Standards Track

source: ftp://ftp.rfc-editor.org/in-notes/rfc2616.txt

You can rely on standards, but not on specifications!

Degrees of Interoperability

- □ How much interoperability do you need?
 - Syntactic?
 - e.g., Remote access to data.
 - Semantic?
 - e.g., Standard metadata formats.
 - Batch or Real-Time?
 - How much semantics to encode in data?
 - How many services/interfaces?
 - What transports?
 - HTTP/SOAP/OAI-PMH/...?

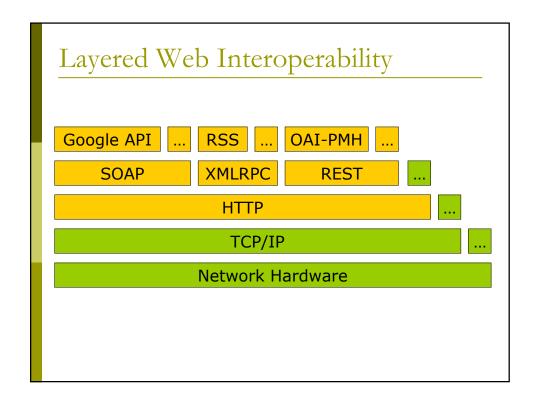

Cathedral vs. Bazaar

- □ Cathedral: One person sets out a specification and everyone must use it.
 - e.g., Google API
- Bazaar: Everyone agrees to a common standard, then everyone implements it.
 - e.g., HTTP

Trust and Security

- □ Interoperability is only possible among trusted parties.
- □ Issues:
 - Authentication
 - Authorisation
 - Encryption
 - Privacy
 - Trust

Validation

- To what degree does an implementation follow a standard?
- Data validation:
 - Does an XML-encoded data stream conform to its DTD? XML Schema?
 - Is the data of a high quality?
 - Is the encoding correct?
- Protocol validation:
 - Is the protocol implementation correct? Robust? Reliable? Consistent?

Protocol Testing

The OAI-PMH defines a set of requests and these requests, specified through an XML so respond to each of the protocol requests wit schema. It also must respond to mal-formed exception conditions.


Conformance Testing for Basic F

A repository must successfully complete the registry:

For every protocol request, the repository re

is valid XML (the XML successfully r

source: http://www.openarchives.org/data/registerasprovider.html#Protocol_Conformance_Testing

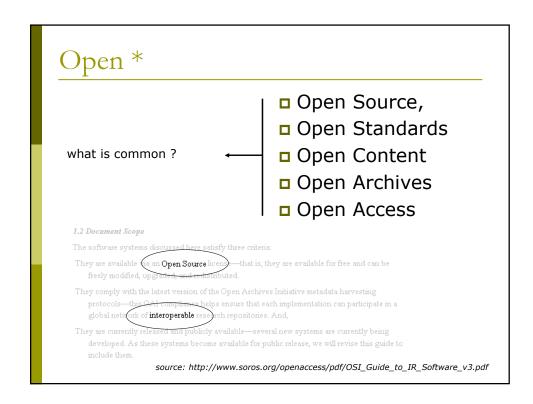

References

- Crow, R. (2004) A Guide to Institutional Repository Software, OSI. Available http://www.soros.org/openaccess/pdf/OSI_Guide to-IR Software v3.pdf
- Fielding, R., J. Gettys, J. Mogul, H. Frystyk, L. Masinter, P. Leach and T. Berners-Lee (1999) Hypertext Transfer Protocol HTTP/1.1, RFC 2616, Network Working Group, IETF. Available ttp://ftp.rfc-editor.org/in-notes/rfc2616.txt
- Open Archives Initiative (2005) Data Provider Registration. Website http://www.openarchives.org/data/registerasprovider.html#Protocol Conformance Testing
- □ Wikipedia (2006) Interoperability. Website http://en.wikipedia.org/wiki/Interoperability